




NATELA-WW440109

24W LINEAR WALL WASHER (1000mm)

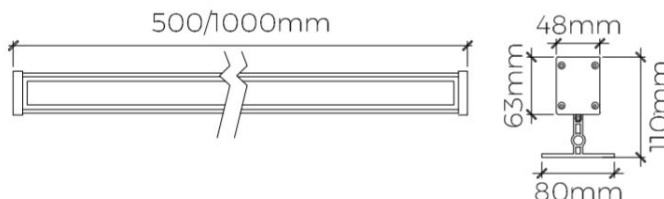

PRODUCT SPECIFICATIONS

| | |
|-------------------|--|
| Fixture Material | Die-cast Aluminium |
| Fixture Finish | Powder-coated Gray |
| Glass | High intensity Tempered Glass |
| Optic | Acrylic Optical lens |
| Driver | Built-in |
| Binning | 3 Step MacAdam |
| Input Wiring | 1 Meter of 2 core 0.75mm ² rubber cable |
| RGB Signal Wiring | 1 Meter of 3 core 0.75mm ² rubber cable |
| Life Span | 50,000 hours |

| | |
|-----------------------|---|
| LED Chip | CREE |
| Power Consumption | 24W |
| Input Voltage | 24VDC. Also available in 180-250VAC 50/60Hz |
| Length | 1000mm. Also available in 500mm |
| Operating Temperature | from -20° to 65° C |
| Color Rendering Index | >85 |
| Driver Protection | Short circuit |
| Warranty | 3 years against manufacturing defects |
| Agency Approval | CE, RoHS |
| Weight | 2100g |



| Power (W) | Available color Temperatures | Luminous Flux | | | IP Rating | Available Beam Angles |
|-----------|---|---------------|---------|---------|-----------|--------------------------|
| | | 3000K | 4000K | 6000K | | |
| 24W | 2700K 3000K 4000K 6000K RGB | 110lm/W | 120lm/W | 130lm/W | 66 | 10° 20° 35° 60° |

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.