




## ABHA-FS330012

### 5X30, 7.2W/M, IP68 LED STRIPLIGHT

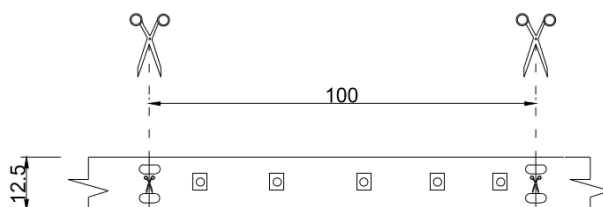

### PRODUCT SPECIFICATIONS

|                        |   |
|------------------------|---|
| Strip Material         | Double Sided Flexible PCB                                     |
| IP68 Seal-out Material | Clear Silicone Rubber   |
| Installation Tape      | 3M Strong Adhesive Stick-on Tape                              |
| Dimmability            | Compatible with Phase Dimming, 0 – 10V Dimming & DALI Dimming |
| Binning                | 3 Step MacAdam  |
| Life Span              | 40,000 hours  |

|                       |                                       |
|-----------------------|---------------------------------------|
| LED Chip              | Samsung                               |
| Number of LEDs        | 150 per Reel (30 per Meter)           |
| Power Consumption     | 36W (7.2W per Meter)                  |
| Input Voltage         | 24VDC                                 |
| Single LED Wattage    | 0.24W                                 |
| Input Voltage         | 24VDC                                 |
| Length                | 5000mm                                |
| Strip Thickness       | 5mm                                   |
| Operating Temperature | from -20° to 50° C                    |
| Color Rendering Index | >80                                   |
| Warranty              | 3 years against manufacturing defects |
| Agency Approval       | CE, RoHS                              |



| Power (W) | Available color Temperatures  | LED Chip Lumen Efficacy |         |         | IP Rating | Available Beam Angles |
|-----------|---|-------------------------|---------|---------|-----------|-----------------------|
|           |   | 3000K                   | 4000K   | 6000K   |           |                       |
| 36W       | 2400K<br>2700K<br><b>3000K</b><br>4000K<br>6000K<br>RED, GREEN, BLUE<br>RGB | 95lm/W                  | 100lm/W | 110lm/W | 68        | <b>120°</b>           |

**Standard option.**

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.



## ACCESSORIES

### Female & Male Connector

The Male & Female connectors help with ease installation and looping between strip lights whilst maintaining the IP67 rating.



### Rubber Bracket

The Rubber Brackets help with ease of installation when mounting the strip lights onto a surface.



### End Cap & Silicone Tube


Fill the endcap with Silicone and place on the strip light in order to safely terminate the power at the end of each strip light.



## POWER SUPPLY DETAILS

### PRODUCT FEATURES

|                       |                          |
|-----------------------|--------------------------|
| Model                 | GL060CV024-220           |
| Life Span             | 50,000 hours             |
| Input Voltage         | 220~240VAC 50/60Hz       |
| Output Voltage        | Constant 24VDC           |
| Output Current        | 2.5ADC                   |
| Power Rating          | 60W                      |
| Protection            | Overload & Short circuit |
| Power Factor          | 0.95                     |
| Operating Temperature | from -40° to 60° C       |
| IP Rating             | 67                       |
| Agency Approvals      | UL, CE, RoHS             |

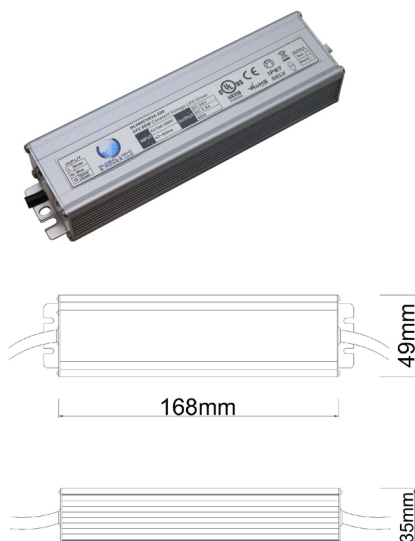



## ACCESSORIES FOR RGB MODEL

---

### DMX MASTER

---



Single zone DMX MASTER to work with remote control.

Model # ACCDCON281501WH

### WIRELESS REMOTE CONTROLLER

---



10 Zones remote control with 10 built-in programs to provide RGB color changing.

Model # ACCDREM280610BK

### DMX DECODER

---



144W / 24VDC, 4 channel DMX Decoder  
4 channels 24VDC with colour decoders with 8A per channel  
Model # ACCDEC210204WH