


# ABHA - FS330012

5X30, 7.2W/M, IP68 LED STRIPLIGHT

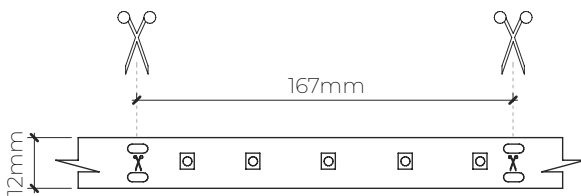

## PRODUCT SPECIFICATIONS

- Strip Material — Double sided flexible PCB
- IP68 Sealant Material — Clear silicone rubber
- Installation Tape — 3M strong adhesive stick-on tape
- Dimmability — Compatible with Phase Dimming, 0 – 10V Dimming & DALI Dimming
- Binning — 3 Step MacAdam
- Life Span — 50,000 hours
- LED Chip — Samsung
- Number of LEDs — 150 per reel (30 per meter)
- Input Voltage — 24VDC
- Single LED Wattage — 0.24W
- Length — 5000mm
- Strip Thickness — 5mm
- Operating Temperature — from -20° to 50°C
- Color Rendering Index — >85
- Warranty — 3 years against manufacturing defects



Power (W)	Available Color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
36W	2400K 2700K <b>3000K</b> 4000K 6000K RED GREEN BLUE RGB	110lm/W	120lm/W	130lm/W	68	120°

### Standard option

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.